



		LED DSR		
		350mA	500mA	700mA
	W tot	1,2W	2W	3W
	ølm	112lm	145lm	180lm



IP65 IK04



Housing: in die-cast aluminium.



Petit 50 - adjustable					
		CLD S+L		LED (Ta=25°C)	
wattage (350mA)	colour	weight	code	W	K - ølm (350mA) - degrees
LED white 1x1,2W	chrome	0,10	220 66565 -00	1,2	6000K - 112lm - 25°
Power supply not included. To purchase separately, see page Technical components.					



ADJUSTABLE RECESSED DOWNLIGHTS

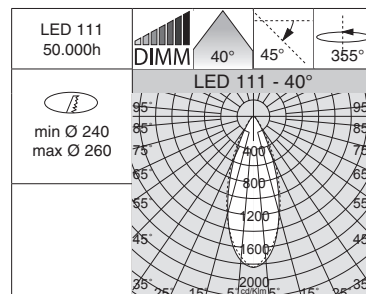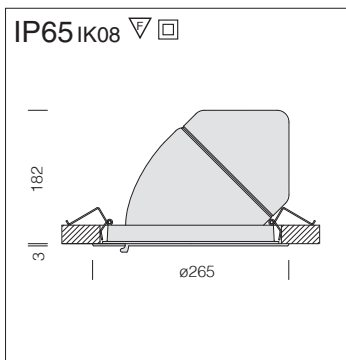

King is a recessed floodlight designed to provide a solution to the lighting of environments requiring a high degree of protection.

Housing: Adjustable-angle, made of die-cast aluminium.

Coating: Humidity-resistant acrylic-resin liquid paint, UV-stabilised.

LED: Luminous flux maintenance L70B50: 50.000h. Power factor >0.95



King - LED 111					
		CLD CELL-D (1-10V)		LED (T _p =75°C)	
wattage	colour	weight	code	W	K - ølm - CRI - degrees
LED 111 32W	white	6,00	22085613-00	35	4000K - 3600lm - CRI 83 - 40°
	m. silver		22085673-00		