

Pannello

The superior quality of LED lighting is now more accessible thanks to a benchmark product that offers, at reduced costs, the ideal light for offices, shopping malls, hotels and in general all those spaces that need constant lighting.

Pannello luminoso comes in either a square or rectangular shape that can be easily installed into ceilings. It is equipped with fast connectors, avoiding the need to open the unit. Its shape guarantees uniform light distribution, while the white-light LEDs (3000 and 4000 K) generate high light quality, ensuring the best visual comfort and perfect colour rendering (CRI 93).

Wiring: rapid wiring connection, the fixture does not need to be opened.

Instant start with no shimmer and absolutely silent operation.

Energy saving of over 50% compared to traditional lights to fluorescent tubes.

Efficiency of the LEDs (95%), overheating protection, current control and ability to work with stabilized voltages.

Special circuit design which makes independent operation of each of the LEDs so as not to impair the operation of the other.

No RF interference and electromagnetic emissions.

No risk to the environment due to the absence of materials containing mercury or lead.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards. Installable on normally inflammable.


LED: 3150/3200lm - 3000/4000K - CRI93 - 33W. DIMM 0-10V

LED: 4900lm - 4000K - CRI93 - 52W- DIMM 0-10V

Power factor: >0,9

Luminous flux maintenance 70% 40000h (L70B50)

Photobiological safety class: exempt group

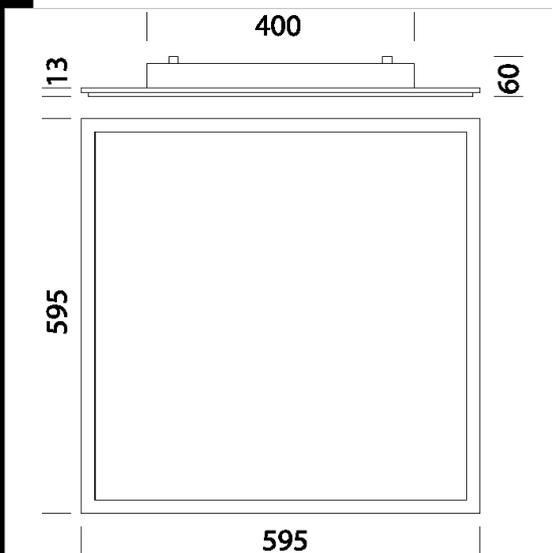

Download

DXF 2D
- 184612.dxf

Montaggi
- pannello_luminoso.pdf

Code	Gear	Kg	Watt	Base	Lamps	Colour
22184612-00	CLD CELL-D	3,90	LED white 31W	-	3200lm-4000K-CRI 93	WHITE
22184613-00	CLD CELL-D	3,64	LED white 31W	-	3150lm-3000K-CRI 93	WHITE
22184614-00	CLD CELL	4,25	LED white 52W	-	4900lm-4000K-CRI 93	WHITE
22184612-09	CLD CELL-D-E	4,29	LED white 31W	-	3200lm-4000K-CRI 93	WHITE
22184613-09	CLD CELL-D-E	3,95	LED white 31W	-	3150lm-3000K-CRI 93	WHITE
22184614-09	CLD CELL-D-E	4,29	LED white 52W	-	4900lm-4000K-CRI 93	WHITE
22184614-1241	CLD CELLDD	4,29	LED white 52W	-	4900lm-4000K-CRI 93	WHITE

Accessories



- Ceiling suspension



- Adapter for Pannello luminoso



- Ceiling suspension - Pannello Luminoso



- Powered suspension