

Focus - Universal adapter

This version features a particular shape and a design with clean lines that can meet different architectonic lighting needs using high colour rendering LEDs. It is an all-new spotlight, which is entirely adjustable for an extraordinarily effective lighting project that adds value to any space and object

Housing: in die-cast aluminium.

Reflector: in die-cast aluminium with anodised heat sink.

Coating: UV-resistant acrylic resin powder coating.

Standard: manufactured pursuant to EN 60598-1-CEI 34.21 and with a degree of protection pursuant to EN 60529.

Normativa: Prodotti in conformità alle norme EN 60598-1-CEI 34.21, hanno grado di protezione secondo le norme EN 60529.

LED: 3000K - 25W - 3500lm - CRI 92 - 31°

LED: 3000K - 36W - 5100lm - CRI 92 - 44°

LED: 3000K - 42W - 5700lm - CRI 92 - 44°


LED: 3000K - 49W - 6500lm - CRI 92 - 44°

on request: 20° - 54°

Luminous flux maintenance L70B50: 50.000h.

Power factor >0.95

Photobiological safety class: exempt group EN62471.

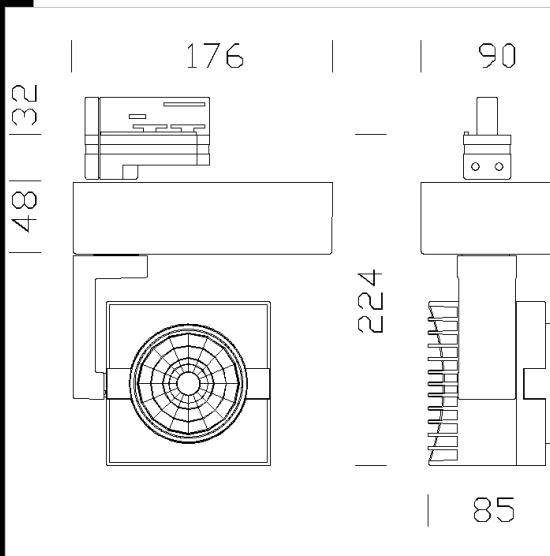

Download

DXF 2D
- matrixfocusbin.dxf

3DS
- fosnova_matrix_focus_bracket_univers

3DM
- fosnova_matrix_focus_bracket_univers

Montaggi
- focus.pdf
- istrifocus.pdf

Code	Gear	Kg	Watt	Base	Lamps	Colour
22103410-00	CLD CELL	1,40	LED COB 25W		3500lm-3000K - 31°-CRI 92	WHITE
22103430-00	CLD CELL	1,40	LED COB 25W		3500lm-3000K - 31°-CRI 92	BLACK
22103470-00	CLD CELL	1,50	LED COB 25W		3500lm-3000K - 31°-CRI 92	SILVER
22103414-00	CLD CELL	1,55	LED COB 42W		5700lm-3000K - 44°-CRI 92	WHITE
22103434-00	CLD CELL	1,40	LED COB 42W		5700lm-3000K - 44°-CRI 92	BLACK
22103474-00	CLD CELL	0,87	LED COB 42W		5700lm-3000K - 44°-CRI 92	SILVER
22103472-00	CLD CELL	1,55	LED COB 36W		5100lm-3000K - 44°-CRI 92	SILVER
22103432-00	CLD CELL	1,20	LED COB 36W		5100lm-3000K - 44°-CRI 92	BLACK
22103412-00	CLD CELL	1,30	LED COB 36W		5100lm-3000K - 44°-CRI 92	WHITE
22103416-00	CLD CELL	1,55	LED COB 49W		6500lm-3000K - 44°-CRI 92	WHITE
22103436-00	CLD CELL	1,55	LED COB 49W		6500lm-3000K - 44°-CRI 92	BLACK
22103476-00	CLD CELL	1,40	LED COB 49W		6500lm-3000K - 44°-CRI 92	SILVER

Accessories



- Universal adapter recessed



- Universal adapter base