


Energy 2180 LED - DIMM



Housing: in die-cast aluminium.
 Diffuser: panel in PMMA, 6 mm thick, with laser silk-screening suitably dimensioned based on the power level of the LED
 Painting: dust painted, using polyester epoxy paint to withstand UV rays.
 Standard supply: Includes adjustable steel bracket.
 Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.
 LED: high-efficiency light sources 1350/1500lm - 18W - 3000/4000K - CRI 90 - DIM IGBT (dimmer must be equipped with adjustment for minimum brightness level)
 Power factor: 0.9
 Photobiological safety class: Exempt group.
 Luminous flux maintenance 70%: 40.000h (L70B50).
 recessed Ø 150/175mm

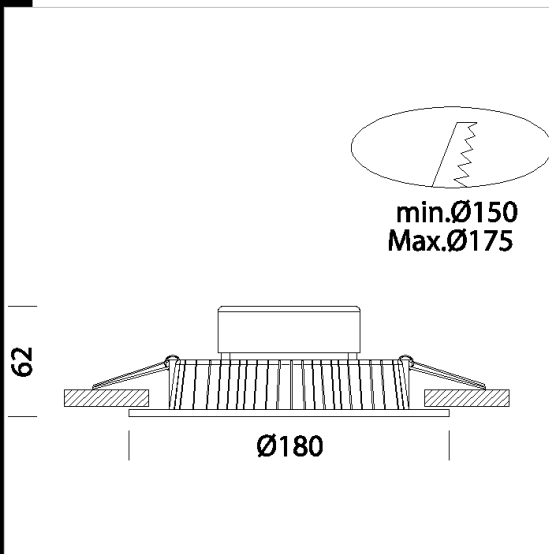

Code	Gear	Kg	Watt	Base	Lamps	Colour
22172513-00	CLD CELL-DI	0,60	LED white 15W	-	1350lm-3000K-CRI 90	WHITE
22172510-00	CLD CELL-DI	0,60	LED white 15W	-	1500lm-4000K-CRI 90	WHITE

Accessories



- Presence and light sensor



Download

DXF 2D
 - energy2180.dxf

Montaggi
 - energy_.pdf