

# PROFI 60 LED SR




Luminaire is equipped with EasyAir Sensor:  
 Communication between luminaires without wires  
 Easy smartphone commissioning  
 Enables gateway data readout  
 Xitanium SR interface (based on DALI 2.0)

Surface mounted LED luminaire with Philips LED modules, Xitanium SR Dali 2.0 standard driver and EasyAir sensor. Available also in suspended version - details below.

Body is made of aluminium profile, standard silver, other RAL colours on request.

Two types of diffusers available:  
 Microprismatic [MPR] or white PMMA Acrylic diffuser [WD]

PROFI luminaires can be ordered as separate products - standard lengths below or can be ordered connected into different lighting runs or systems. Please contact our sales department for further details.

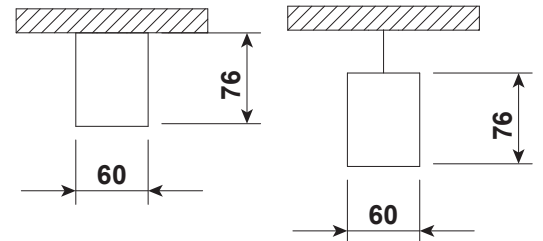


Index no.	LED output [lm]	LED Power [W]	Colour temp. [K]	Colour tolerance [MacAdam]	CRI	Lifetime [h]	Type of diffuser	Length / Size [mm]	Type of installation	Driver
6262.SR.2200/830/MPR	2200	12	3000	3	Ra > 80	50.000	MPR	640	surface mounted	Xitanium SR
6262.SR.2200/840/MPR	2200	12	4000	3	Ra > 80	50.000	MPR	640	surface mounted	Xitanium SR
6262.SR.3300/830/MPR	3300	18	3000	3	Ra > 80	50.000	MPR	920	surface mounted	Xitanium SR
6262.SR.3300/840/MPR	3300	18	4000	3	Ra > 80	50.000	MPR	920	surface mounted	Xitanium SR
6262.SR.4400/830/MPR	4400	24	3000	3	Ra > 80	50.000	MPR	1200	surface mounted	Xitanium SR
6262.SR.4400/840/MPR	4400	24	4000	3	Ra > 80	50.000	MPR	1200	surface mounted	Xitanium SR
6262.SR.5500/830/MPR	5500	30	3000	3	Ra > 80	50.000	MPR	1500	surface mounted	Xitanium SR
6262.SR.5500/840/MPR	5500	30	4000	3	Ra > 80	50.000	MPR	1500	surface mounted	Xitanium SR
6262.SR.2200/830/WD	2200	12	3000	3	Ra > 80	50.000	WD	640	surface mounted	Xitanium SR
6262.SR.2200/840/WD	2200	12	4000	3	Ra > 80	50.000	WD	640	surface mounted	Xitanium SR
6262.SR.3300/830/WD	3300	18	3000	3	Ra > 80	50.000	WD	920	surface mounted	Xitanium SR
6262.SR.3300/840/WD	3300	18	4000	3	Ra > 80	50.000	WD	920	surface mounted	Xitanium SR
6262.SR.4400/830/WD	4400	24	3000	3	Ra > 80	50.000	WD	1200	surface mounted	Xitanium SR
6262.SR.4400/840/WD	4400	24	4000	3	Ra > 80	50.000	WD	1200	surface mounted	Xitanium SR
6262.SR.5500/830/WD	5500	30	3000	3	Ra > 80	50.000	WD	1500	surface mounted	Xitanium SR
6262.SR.5500/840/WD	5500	30	4000	3	Ra > 80	50.000	WD	1500	surface mounted	Xitanium SR

- \* Luminaire is also available in suspended version details below.
- \* UGR<19 version on request
- \* CRI > 90 version on request
- \* Different than standard lumen output or length available on request

Index no.	Steel wire suspension
6247.15	single 1,5 m long suspension set for PROFILUMINAIRE - 2 pcs. per luminaire needed.
6564.15	1,5 m long transparent power cable with ceiling base and terminal block

#### Accessories



6247.15



6564.15