



PLAFO 650 LED SR

Surface mounted LED luminaire with Philips LED modules, Xitanium SR Dali 2.0 standard driver and EasyAir sensor. Luminaire is also available in suspended version - details below.
 Body is made of steel and aluminium, standard white, other RAL colours on request.
 Two types of diffusers available:
 Microprismatic [MPR] or white PMMA Acrylic diffuser [WD]

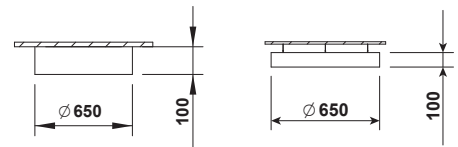

Available luminaire versions

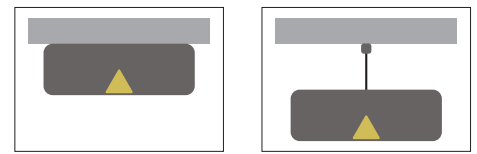


Luminaire is equipped with EasyAir Sensor:
 Communication between luminaires without wires
 Easy smartphone commissioning
 Enables gateway data readout
 Xitanium SR interface (based on DALI 2.0)




Index no.	LED output [lm]	LED Power [W]	Colour temp. [K]	Colour tolerance [MacAdam]	CRI	Lifetime [h]	Type of diffuser	Length / Size [mm]	Type of installation	Driver
6356.SR.7000.830/MPR	7000	49	3000	3	Ra > 80	50.000	MPR	Ø 650	surface mounted	Xitanium SR
6356.SR.7000.840/MPR	7000	49	4000	3	Ra > 80	50.000	MPR	Ø 650	surface mounted	Xitanium SR
6356.SR.7000.830/WD	7000	49	3000	3	Ra > 80	50.000	WD	Ø 650	surface mounted	Xitanium SR
6356.SR.7000.840/WD	7000	49	4000	3	Ra > 80	50.000	WD	Ø 650	surface mounted	Xitanium SR

* Luminaire is also available in suspended version details below.
 * Different lumen output or wattage available on request.

Index no.	Steel wire suspension
6247.15	single 1,5 m long suspension set for PLAFO luminaire - 4 pcs. for PLAFO 650
6628.15	1,5 m long transparent power cable with ceiling base and terminal block

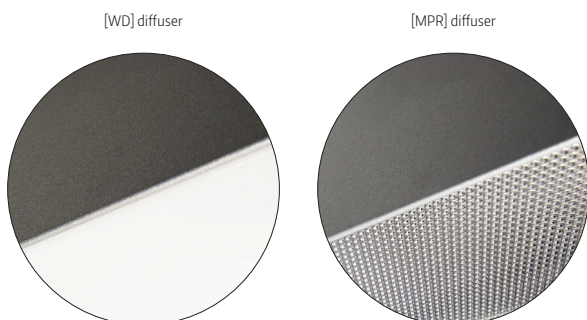

Accessories



6247.15



6628.15