


## GLOBO LED SR

Pendant LED luminaire with Philips LED modules, Xitanium SR Dali 2.0 standard driver and EasyAir sensor

<b>Mounting:</b>	Suspended on 1,5m long wire suspension
<b>Body material:</b>	Steel and aluminium
<b>Colour:</b>	Special CORTEN effect
<b>LED module:</b>	Philips / Osram or Tridonic LED module included
<b>Colour temperature:</b>	3000K or 4000K
<b>Colour Rendering Index (CRI)</b>	>80 in standard
<b>Driver:</b>	Electronic driver or electronic integrated, DALI on request
<b>Emergency unit:</b>	On request
<b>Movement sensor:</b>	N/A
<b>Daylight control sensor:</b>	N/A
<b>Operating temperature range:</b>	0°C ... +40°C
<b>IP Class:</b>	IP20 in standard, IP44 on request
<b>Power:</b>	220-240V 50/60Hz
<b>Lighting direction:</b>	Direct lighting
<b>Reflector type:</b>	Aluminium white
<b>Light distribution:</b>	Symmetric
<b>General data:</b>	5 Years standard warranty, possible extension with project registration



Luminaire is equipped with EasyAir Sensor:  
 Communication between luminaires without wires  
 Easy smartphone commissioning  
 Enables gateway data readout  
 Xitanium SR interface (based on DALI 2.0)

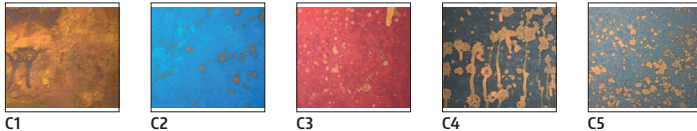

Available colour finish

Different lumen output or wattage available on request

All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used



Index no.	LED output [lm]	LED Power [W]	Colour temp. [K]	Colour tolerance [MacAdam]	CRI	Lifetime [h]	Type of diffuser	Type of installation	Driver
6842.SR.1000.830/MPR	1000	15	3000	3	Ra > 80	50.000	MPR	surface mounted	Xitanium SR
6842.SR.1000.840/MPR	1000	14	4000	3	Ra > 80	50.000	MPR	surface mounted	Xitanium SR
6842.SR.2000.830/MPR	2000	18	3000	3	Ra > 80	50.000	MPR	surface mounted	Xitanium SR
6842.SR.2000.840/MPR	2000	17	4000	3	Ra > 80	50.000	MPR	surface mounted	Xitanium SR
6842.SR.3000.830/MPR	3000	27	3000	3	Ra > 80	50.000	MPR	surface mounted	Xitanium SR
6842.SR.3000.840/MPR	3000	26	4000	3	Ra > 80	50.000	MPR	surface mounted	Xitanium SR
6842.SR.4000.830/MPR	4000	32	3000	3	Ra > 80	50.000	MPR	surface mounted	Xitanium SR
6842.SR.4000.840/MPR	4000	32	4000	3	Ra > 80	50.000	MPR	surface mounted	Xitanium SR

\* Different lumen output or wattage available on request.

