



## Riflesso

Reflections of direct and indirect light on wall surfaces. Lighting to define routes and create decorative effects.  
Housing: in painted aluminium, designed for wall-mounting.

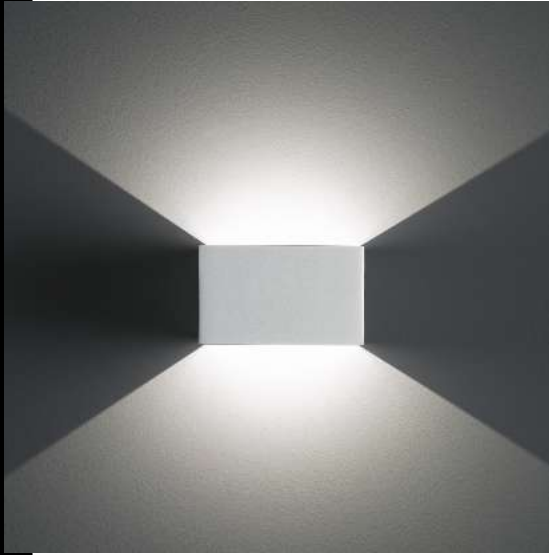

### Download

- DXF 2D  
- riflesso.dxf
- Montaggi  
- CURVE\_RIFLESSO.pdf

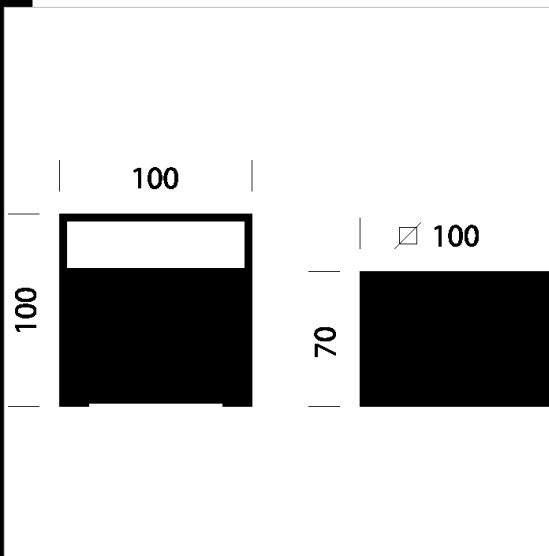

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22084810-00	CLD CELL	0.45	LED-374lm-3000K-CRI 80	6 W	BIANCO

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated