




## Marte 5

Housing: Die-cast aluminium  
 Reflector: In metalized polycarbonate to high rendering.  
 Regulations: Produced according to applicable EN60598 - CEI 34 - 21 standards, degree of protection according to EN 60529 standards  
 Power factor:  $\geq 0.9$   
 Luminous flux maintenance 80%: 50.000h (L80B20).  
 Photobiological safety class: exempt group EN62471.

### Download

DXF 2D  
 - marte5.dxf  
 Montaggi  
 - MARTE\_4-5-6-7-8-9-10-11-12.pdf

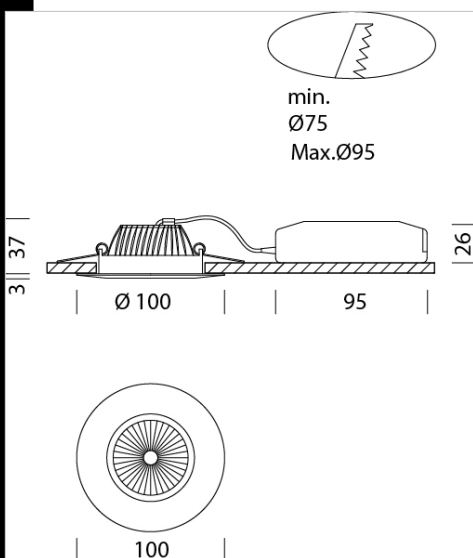

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22061811-00	CLD CELL	0.21	LED COB-642lm-3000K-30°-CRI 90	8 W	BIANCO

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated