


## Antares IP - DIMM

Housing: Die-cast aluminium  
 Reflector: In metalized polycarbonate to high rendering.  
 Regulations: Produced according to applicable EN60598 - CEI 34 - 21 standards, degree of protection according to EN 60529 standards  
 On request: IP65 Silicone rubber protection gasket compliant with French low-energy building standards (BBC).  
 Power factor:  $\geq 0.9$   
 Luminous flux maintenance 70% 50000h (L70B50)  
 Photobiological safety class: exempt group EN62471.



Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22062410-00	CLD CELL-DI	0.38	LED COB-671lm-3000K-38°-CRI 92	10 W	BIANCO
22062411-00	CLD CELL-DI	0.39	LED COB-743lm-4000K-38°-CRI 92	10 W	BIANCO

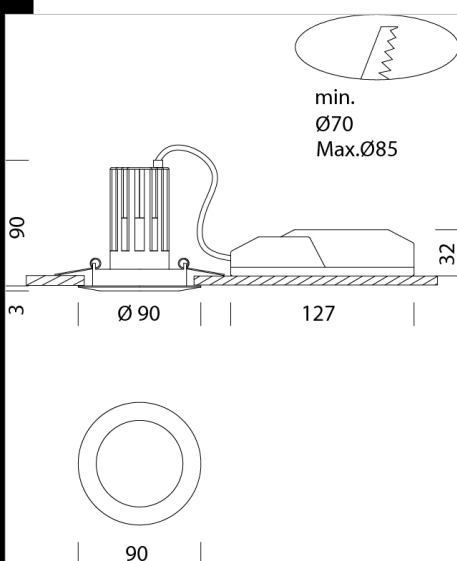

### Download

DXF 2D  
 - antares.dxf

Montaggi  
 - antares rev1.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated